



CINEPOLIS REACH GURGAON, INDIA



Product Specifications

Structure

- Moulded structure holding the backrest and seat made up of 6 mm Thk. Metal plate and 20mm x 20mm x 2mm rectangular hollow section with interchangeable backrest pitch.

Backrest and Seat

- Inner ply is made of 15 mm thick press curved plywood, covered with high resilience foam of 45-100mm thickness and upholstered in leatherette / leather / fabric.
- Seat unit with 18mm compressed plywood fully covered with high resilience foam of 105 - 145mm thickness and upholstered in leatherette / leather / fabric.

Armrests and Panel

- Fixed with high resilience foam and black polyurethane for armrest and cup holder, upholstered in leatherette / leather / fabric.
- Wooden end panel upholstered in leatherette / leather / fabric.

Legs

- Legs are of lateral slope design made of a rectangular hollow section of 78mm x 38mm x 2.3mm Thk. continuously welded to 8mm thickness steel plate.

Metal and Upholstery Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.
- Refer Ferco standard fabric / leatherette / leather charts.

Fire Resistance


- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty

- Refer to Ferco Product Warranty.


Options

- Single seat / Linked seat
- Round seat numbering
- Row lettering type E with Aisle light
- Row lettering type A
- Variable cupholders
- Embroidery Logo
- Embroidery seat numbering
- Rocker Backrest
- Foot Cover
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5

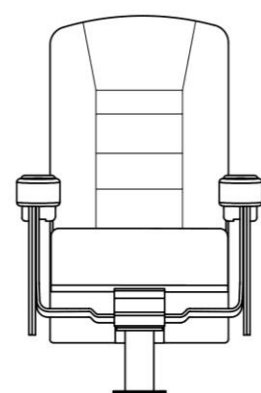

610 (24")
585 (23")

RH
FH

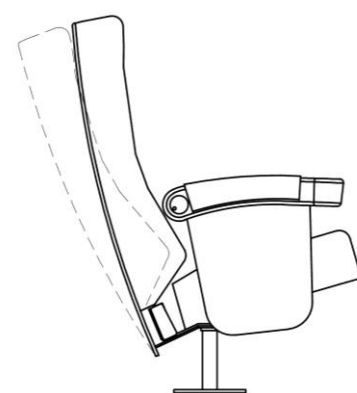

RC
FC

DIMENSIONS	
RH	1045 (41.5")
FH	1055 (42")
RC	950 (37.5")
FC	800 (31.5")