



510 (20") 535 (21")
560 (22")



C

DIMENSIONS	
H	C
930 (37")	440 (17.5")

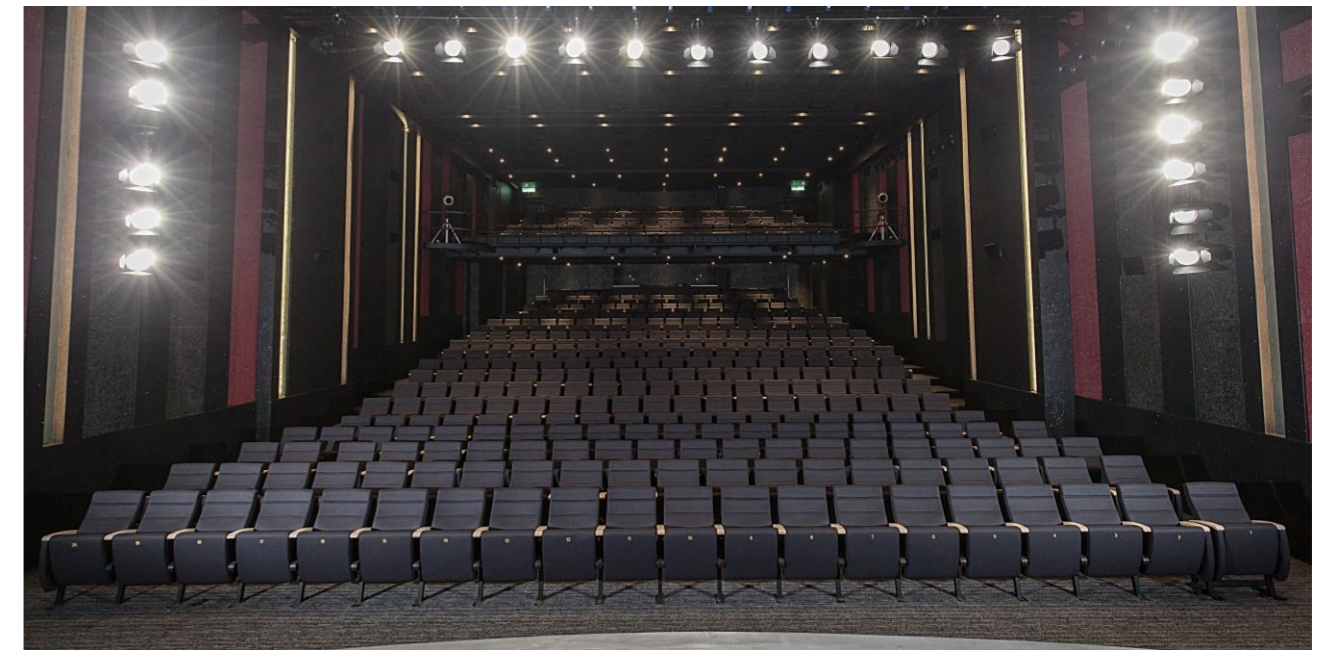

THE PLATFORM KUALA LUMPUR, MALAYSIA

Product Specifications

Backrest

- Inner structure made of 13mm thick wooden ply.
- Covered with foam of 20–65mm thickness, density 45kg/m³.
- Fully upholstered in fabric / leatherette / leather.

Seat

- Covered with foam of 70mm–90mm thickness, density 60kg/m³.
- Inner structure made of Ø21mm tubular steel frame, integrated with polyurethane foam.
- Fully upholstered in fabric / leatherette / leather.
- Tip-up seat with counterweight systems and being lift-up by means of gravity.

Armrest, Panel & Leg

- Armrest top from 30mm thick solid wood.
- Decorative aisle panel from MDF board and upholstered with padded fabric / leatherette / leather.
- Legs of lateral pedestal design made of 38 x 38 x 2.3mm thk S.H.S. continuously welded to 6mm thickness steel plate.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish of at least 60 microns for indoor use.
- Conformity with BS-6496 hardness test.

Upholstery Material

- Refer to Ferco standard fabric / leatherette / leather charts.

Fire Safety

- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty

- Refer to Ferco product warranty.

Options

- Row lettering type A
- Row lettering type E with Aisle light
- Aluminium round row lettering
- Round seat numbering
- Embroidery logo
- Embroidery seat numbering
- Tandem removable leg
- Free standing leg
- Castor wheel
- A.D.A Panel
- Wrimatic Lite
- Wooden outer back / seat outer
- Wooden / upholstered armrest
- Wooden panel
- ProBax
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5