



CINEMA CITY SHARJAH, UAE

Product Specifications

Structure

- Moulded structure holding the backrest and seat made up of 6 mm Thk. metal plate and 20mm x 20mm x 2mm rectangular hollow section with interchangeable backrest pitch.

Backrest and Seat

- Backrest (with headrest) with inner structure made of Ø19mm x Thk 2.0mm metal frame covered with high resilience foam upholstered with leatherette / leather / fabric and topped with backrest and headrest paddings made from high resilience foam and upholstered in leatherette / leather / fabric.
- Seat unit with inner structure made of Ø19mm x Thk 2.0mm metal frame fully padded with high resilience foam and upholstered with leatherette / leather / fabric. Topped with Seat padding made from high resilience foam upholstered in leatherette / leather / fabric.

Armrests and Panel

- Fixed with high resilience foam upholstered in leatherette / leather / fabric and black polyurethane for armrest and cup holder.
- Wooden end panel upholstered in leatherette / leather / fabric.

Legs

- Legs are of lateral slope design made of a rectangular hollow section of 78mm x 38mm x 2.3mm Thk. continuously welded to 8mm thickness steel plate.

Metal and Upholstery Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.
- Refer Ferco standard fabric / leatherette / leather charts.

Fire Resistance


- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty

- Refer to Ferco Product Warranty.

Options

- Single seat / Linked seat
- Round seat numbering
- Row lettering type E with Aisle light
- Row lettering type A
- Variable cupholders
- Embroidery Logo
- Embroidery seat numbering
- Rocker Backrest
- Foot Cover
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5

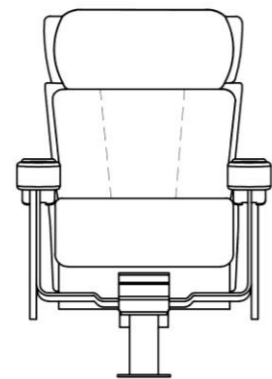

RH
FH

610 (24")
585 (23")



RC
FC

DIMENSIONS	
RH	1150 (45.5")
FH	1000 (39.5")
RC	1010 (40")
FC	860 (34")