



EMAX II CINEMA, HONG KONG



**Product Specifications**

**Backrest**

- Inner ply is made of 13 mm thick press curved plywood, covered with high resilience foam of 80-130mm thickness and upholstered in leatherette / leather / fabric.
- Headrest inner structure made of Ø16mm x Thk 1.6mm moulded with high resilience foam, upholstered in leatherette / leather / fabric.

**Fire Safety**

- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

**Seat**

- Seat unit with 15mm compressed plywood fully covered with high resilience foam of 105 - 155mm thickness and upholstered in leatherette / leather / fabric.

**Warranty**

- Refer to Ferco Product Warranty.

**Options**

- Round seat numbering
- Row lettering type A
- Row lettering type E with Aisle light
- ¾ laminated outer back
- Embroidery logo
- Embroidery seat numbering
- Removable headrest cover
- Retractable intermediate armrest
- Tandem free standing/Tandem removable leg
- Castor wheel
- A.D.A Panel
- Tip-down seat
- Fixed seat
- Twin seat
- Rocker backrest
- Variable cupholders
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5

**Armrests, Panel & Leg**


- Made by high resilience foam and upholstered in leatherette / leather / fabric.
- Aisle panel made of MDF board and upholstered with leatherette / leather / fabric.
- Centre and end legs are of lateral pedestal design made of a square hollow section of 38mm x 38mm x Thk 2.3mm continuously welded to 6mm thickness steel plate.

**Metal Finishing**


- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.

**Upholstery Material**

- Refer Ferco standard fabrics / leatherette / leather charts.

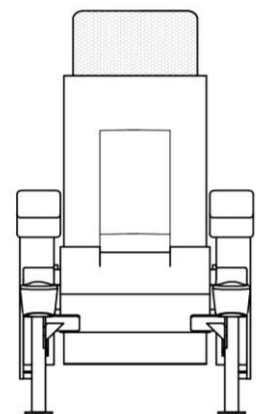

560 (22") 585 (23")  
610 (24")

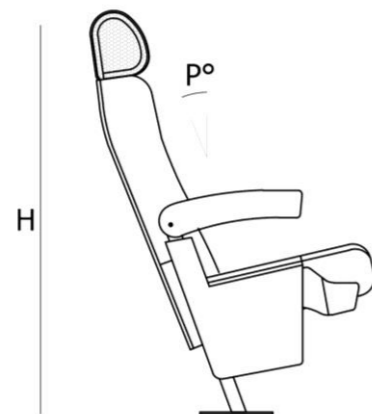

DIMENSIONS		
P°	H	C
17°*	1130 (44.5")	740 (29.5")
20°	1120 (44.5")	790 (31.5")
23°	1110 (44")	840 (33.5")
26°**	1100 (43.5")	890 (35")

\* APPLICABLE FOR ROCKER BACK ONLY  
\*\* APPLICABLE FOR FIXED BACK ONLY