



MUVI CINEMA TALA MALL, KSA

Product Specifications

Structure

- Combination of a wooden panel frame and a steel frame covered with high resilience foam and polyester then upholstered in leatherette / leather / fabric.

Backrest and Seat

- Inner back frame is made of plywood and solid wood frame covered with polyester, upholstered in leatherette / leather / fabric.
- Seat unit with 12mm compressed plywood fully covered with high resilience foam of 90 - 126mm thickness and upholstered in leatherette / leather / fabric. Detachable leatherette / leather / fabric seat & footrest padded cover added on top.

Panel

- Panel with foam and upholstered in fabric, with a built in cup holder on the front.

Recliner Mechanism

- Electrically dual-motor operated.
- In compliance with EMC 2014/30/EU & LVD 2014/35/EU.
- Auto-return function.
- Push force (min. to max.) : 750N - 4000N.
- Pull force (min. to max.) : 750N - 4000N.
- Includes adapter (input) : 110V-240V). (output) : DC 29V, 1.8A).
- Operating temperature : 0° - 40 °C.

Metal and Fabric Finishing

- Zigzag lever systems that ensure the backrest and footrest are being operated smoothly.
- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.
- Refer Ferco standard fabrics / leatherette / leather charts.

Fire Safety


- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty


- Refer to Ferco product warranty.

Options

- Row lettering type E with Aisle light
- Row lettering type A
- Embroidery logo
- Embroidery seat numbering
- Remote control pocket
- Twin seat
- Auto return
- Dual USB charging port
- Cleaner switch
- Stand alone oval table
- Manual easy lift system
- Call button
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5



950 (37.5")

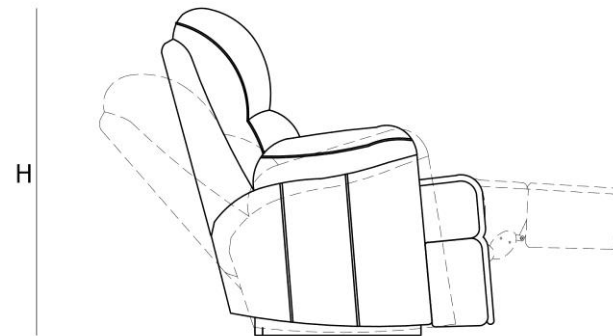

C

DIMENSIONS	
H	1060 (42")
C	1090 (43")