



MUVI CINEMA TALA MALL, KSA



Product Specifications

Structure

- Made up of mild steel hollow section in various sizes like: 19mm x 19mm x Thk1.6mm, 19mm x 38mm x Thk 2.0mm, metal plate Thk5.0mm and Ø19 x Thk 2.0mm.

Backrest and Seat

- Fixed backrest with inner structure made of Ø19mm x Thk 2.0mm metal frame covered with high resilience foam, upholstered in leatherette / leather / fabric.
- Seat unit with 18mm compressed plywood fully covered with high resilience foam of 120 - 125mm thickness and upholstered in leatherette / leather / fabric.

Armrests and Panel

- Combination of wooden ply, solid wood, and a mild steel frame. Then topped with high resilience foam, upholstered in leatherette / leather / fabric and built-in cup holder.

Metal and Upholstery Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.
- Refer Ferco standard fabrics / leatherette / leather charts.

Fire Resistance


- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty


- Refer to Ferco product warranty.

Options

- Single seat / Linked seat / Twin seat
- Embroidery logo
- Embroidery seat numbering
- Row lettering type A
- Row lettering type E with Aisle light
- Rectangular seat numbering
- Puck light
- Swivel table A & B
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5

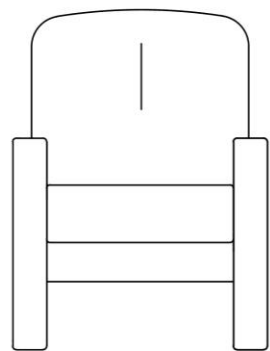

660 (26")

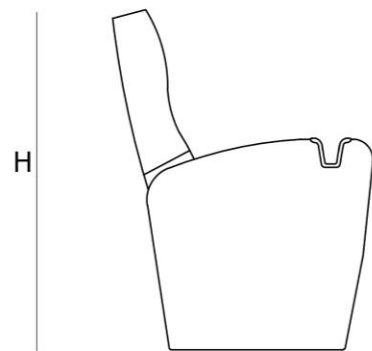

H

C

DIMENSIONS	
H	1000 (39.5")
C	780 (31")